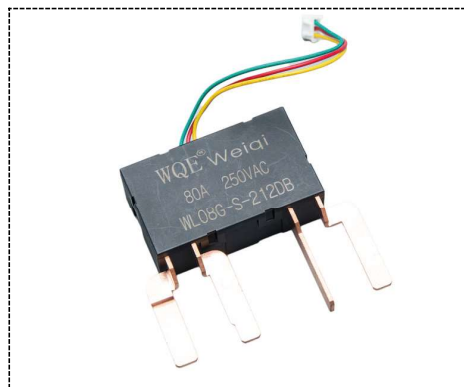


特点characteristic

- 1、体积小, 60A/80A触点切换能力
Small size,60A/80 switching capability.
- 2、线圈功耗小、温升极低
Low coil consumption, ultra-low temperature rise
- 3、触点接触电阻小, 电接触稳定性好
Low contact resistance
- 4、抗冲击、抗振动能力强
Strong anti-shock and anti-vibration capability 5、

外形尺寸: (53.6×30.3×18) mm

Outline size: (53.6×30.3×18) mm

**触点参数Contact parameters**

型号Model	WL08G
触点形式Contact form	2A, 2B
最大切换电流Maximum switching current	60A/80
最大切换电压Maximum switching voltage	250AC
最大切换功率Maximum switching power	15000VA/20000VA
触点负载 (阻性) Contact load (resistive)	60A 250VAC/80A 250VAC

性能参数performance parameter

触点材料Contact material	银合金 Ag alloy	
接触电阻Contact resistance	60A:≤1.5mΩ , 80A:≤1.2mΩ	
动作时间Action time	≤30S	
释放时间Release time	≤30S	
绝缘电阻Insulation resistance	Min 1000MΩ (500VDC)	
介质耐压 Dielectric Strength	断开触点间 Between Open contacts	AC 2000VAC 50/60Hz 1min
	触点线圈间 Between contact coils	AC 4000VAC 50/60Hz 1min
冲击 to attack	稳定性stability	100m/S ² (10g)
	强度strength	1000m/S ² (100g)
振动Vibration	10~55Hz 双振幅 Double Amplitude 1.5mm	
机械寿命Mechanical endurance min	5×10 ⁵	
电气寿命Electrial eddurance min	1×10 ⁴	
相对湿度Humidity	98%RH,40°C	
环境温度Ambient temperature	-40~+70°C	
重量Weight	约Approx 80g	
引出端方式Termination	快连接式 Fast connection	

订货示例 Ordering example

	WL08G	-F	-2	12	D	B	X
继电器型号 Type							
密封型式: F-防尘式 Construction: F-Flux proofed							
继电器触点组数: 2-2组触点 Number of Poles: 2-2 group							
线圈电压: 9, 12, 24, 48VDC Coil Voltage: 9, 12, 24, 48VDC							
线圈形式: 无-单线圈, D-双线圈 Coil type: Nil-Single coil, D-Double coil							
触点形式: B-常闭, M-常开 Contact Arrangement: B-N/C, M-N/O							
特规参数: 根据客户要求定制 无-标准型 Special parameters: customized according to customer requirements Nil-standard							

线圈Coil


线圈功耗Coil power	单线圈: 2.3W, 双线圈: 4.6W Single Coil: 2.3W, Double Coil: 4.6W
----------------	--

线圈参数Coil parameters

(at 20°C)

线圈形式 Coil type	额定电压 rated Voltage	线圈电阻 Coil Resistance	动作电压 Pick-up Voltage 额定电压的75% 75% of rated voltage	脉冲宽度 Pulse Duration	功率 Coil Power
	VDC	$\Omega \pm 10\%$	VDC	ms	W
单线圈 Single coil	9	35	6.75	50	2.3
	12	62	9	50	
	24	250	18	50	
	48	1000	36	50	
双线圈 Double coil	9	2×17.5	6.75	50	4.6
	12	2×31	9	50	
	24	2×125	18	50	
	48	2×500	36	50	

外形及安装图 Outline and installation drawing

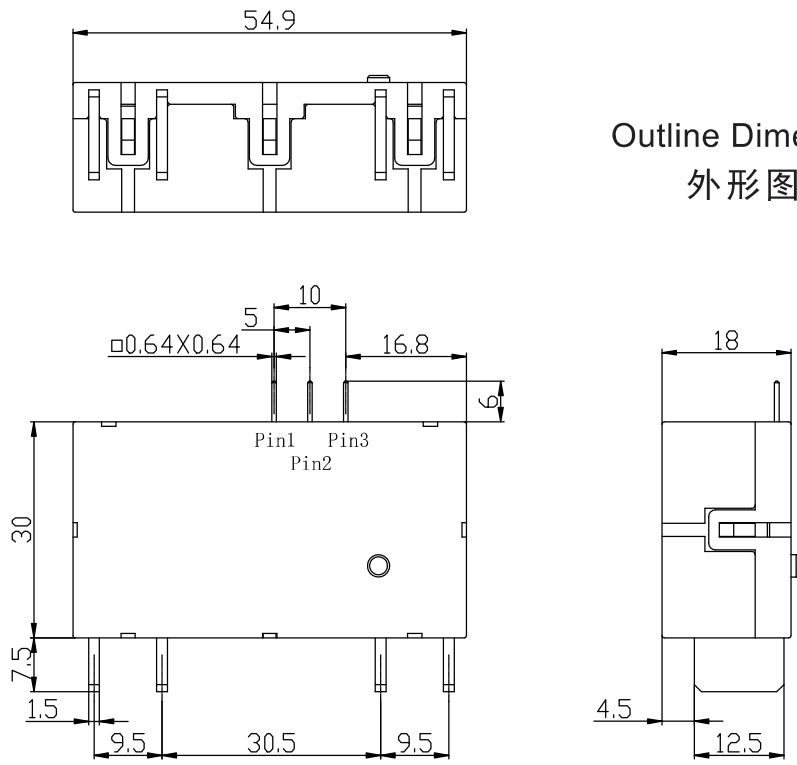

Outline Dimensions
外形图

